


VCTS-Z-p

Adjustable lobe knobs
with push action



ELESA Original design

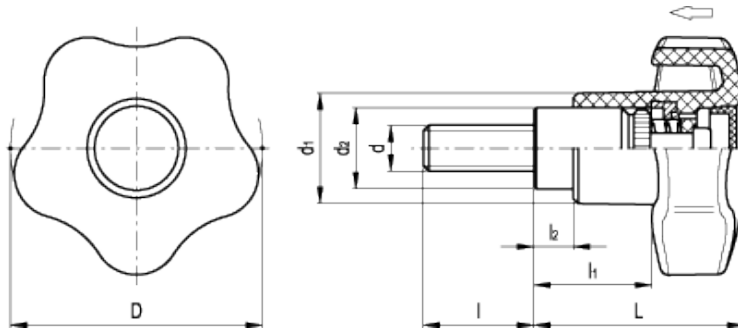

technical informations

Knob

Glass-fibre reinforced polyamide based (PA) technopolymer. Resistant to solvents, oils, greases and other chemical agents. Built-in zinc alloy toothed insert for coupling to the metal clamping element.

Colour

Black, matte finish.

Centre cap

Black technopolymer centre cap. On request and for sufficient quantities, it can be supplied in yellow RAL 1021 (safety) or in other colours, with customised graphic symbols, marks or writings.

Clamping element

Black-oxide steel with toothed element for coupling to the built-in zinc alloy insert, black-oxide steel retaining screw and AISI 302 stainless steel return spring.

Features and applications

Particularly suitable where the knob needs to turn freely to avoid that clamping may be accidentally affected.

Instructions

Press the knob to engage the tothing and turn it.
By releasing the knob the spring releases the tothing, thus the knob returns to the rest position.

Ergonomy and design

The particular design of this knob follows rigorous ergonomic standards: five-lobe shape, blended radius, well proportioned rim height offer a natural, safe and comfortable grip, allowing the operator to obtain a strong clamping action.

Standard Elements		Main dimensions						Thread		Teeth no.	Weight
Code	Description	D	L	d ₁	d ₂	l ₁	l ₂	d	l	z	g
169731	VCTS-Z-40 p-M6x20	40	37	18	13.5	22	7	M6	20	24	40
169732	VCTS-Z-40 p-M6x25	40	37	18	13.5	22	7	M6	25	24	42
169733	VCTS-Z-40 p-M6x32	40	37	18	13.5	22	7	M6	32	24	45
169734	VCTS-Z-40 p-M6x40	40	37	18	13.5	22	7	M6	40	24	50
169741	VCTS-Z-40 p-M8x20	40	37	18	13.5	22	7	M8	20	24	42
169742	VCTS-Z-40 p-M8x25	40	37	18	13.5	22	7	M8	25	24	44
169743	VCTS-Z-40 p-M8x32	40	37	18	13.5	22	7	M8	32	24	47
169744	VCTS-Z-40 p-M8x40	40	37	18	13.5	22	7	M8	40	24	52
169752	VCTS-Z-50 p-M8x25	50	42	22	16	23	8	M8	25	26	58
169753	VCTS-Z-50 p-M8x32	50	42	22	16	23	8	M8	32	26	62
169754	VCTS-Z-50 p-M8x40	50	42	22	16	23	8	M8	40	26	68
169755	VCTS-Z-50 p-M8x50	50	42	22	16	23	8	M8	50	26	74
169762	VCTS-Z-50 p-M10x25	50	42	22	16	23	8	M10	25	26	60
169763	VCTS-Z-50 p-M10x32	50	42	22	16	23	8	M10	32	26	64
169764	VCTS-Z-50 p-M10x40	50	42	22	16	23	8	M10	40	26	70
169765	VCTS-Z-50 p-M10x50	50	42	22	16	23	8	M10	50	26	76



STANDARD MACHINE ELEMENTS WORLDWIDE